

# MICROLUBE GL 261, GL 262

Special lubricating greases for boundary friction conditions and tribo-corrosion



## Benefits for your application

- **Optimum lubrication in the boundary friction regime, thus preventing machine downtime due to tribo-corrosion**
- **Tried-and-tested for many years and approved by OEMs**
- **Longer component life due to special additives, especially with oscillations and micro-movements**
- **Trouble-free operation of machines due to good pumpability in central lubrication systems**

## Description

MICROLUBE GL 261, GL 262 greases are special lubricating greases on a mineral oil base. They also contain special lithium soap and the MICROLUBE additive package, which ensures a wear-free surface finish. Running-in wear is reduced to a minimum. In addition, the MICROLUBE additive package provides protection in the boundary friction regime, thus preventing tribo-corrosion. MICROLUBE GL 261, GL 262 greases have the capacity to absorb high pressures, and they have good anti-corrosion properties.

## Application

MICROLUBE GL 261, GL 262 greases are particularly suitable for low to medium-speed plain and rolling bearings, and for swivel movements and vibrations.

Other applications:

- linear guides
- serrations, multiple spline shafts
- small gears, e.g. adjustment gears

They are generally suitable for machine elements potentially subject to tribo-corrosion.

## Application notes

MICROLUBE GL 261, GL 262 greases can be precisely applied by brush, spatula, grease gun, and through centralized lubrication systems.

## Material safety data sheets


Material safety data sheets can be downloaded or requested via our website [www.klueber.com](http://www.klueber.com). You may also obtain them through your contact person at Klüber Lubrication.

Pack sizes	MICROLUBE GL 261	MICROLUBE GL 261 Spray	MICROLUBE GL 262
Cartridge 400 g	+	-	+
Can 1 kg	+	-	+
Bucket 25 kg	+	-	+
Drum 180 kg	+	-	+
Aerosol can 250 ml	-	+	-

# MICROLUBE GL 261, GL 262

Special lubricating greases for boundary friction conditions and tribo-corrosion


Product data	MICROLUBE GL 261	MICROLUBE GL 261 Spray	MICROLUBE GL 262
Article number	020195	120101	020200
Upper service temperature	140 °C / 284 °F	140 °C / 284 °F	140 °C / 284 °F
Lower service temperature	-30 °C / -22 °F	approx. -30 °C / -22 °F	-25 °C / -13 °F
Speed factor (n x dm)	300 000 mm/min	300 000 mm/min	300 000 mm/min
Worked penetration, DIN ISO 2137, 25 °C, upper limit value	340 x 0.1 mm	340 x 0.1 mm	295 x 0.1 mm
Worked penetration, DIN ISO 2137, 25 °C, lower limit value	310 x 0.1 mm	310 x 0.1 mm	265 x 0.1 mm
Kinematic viscosity of the base oil, DIN 51562 pt. 01/ASTM D-445/ASTM D 7042, 40 °C	approx. 290 mm <sup>2</sup> /s		approx. 280 mm <sup>2</sup> /s
Kinematic viscosity, DIN 51562 pt. 01/ASTM D-445/ASTM D 7042, 100 °C	approx. 20 mm <sup>2</sup> /s		approx. 20 mm <sup>2</sup> /s
Corrosion inhibiting properties of lubricating greases, DIN 51802, (SKF-EMCOR), test duration: 1 week, distilled water	<= 1 corrosion degree	<= 1 corrosion degree	<= 1 corrosion degree
Flow pressure of lubricating greases, DIN 51805, test temperature: -25 °C			<= 1 400 mbar
Flow pressure of lubricating greases, DIN 51805, test temperature: -30 °C	<= 1 400 mbar	<= 1 400 mbar	
Density at 20 °C	approx. 0.89 g/cm <sup>3</sup>	approx. 0.89 g/cm <sup>3</sup>	approx. 0.89 g/cm <sup>3</sup>
Drop point, DIN ISO 2176	>= 220 °C	>= 220 °C	>= 250 °C
Colour space	yellow	yellow	yellow
Appearance	almost transparent	almost transparent	almost transparent
Chemical composition, thickener	special lithium soap	lithium soap	special lithium soap
Chemical composition, type of oil	mineral oil	mineral oil	mineral oil
Texture	homogeneous	homogeneous	homogeneous
Texture	fibrous	fibrous	fibrous
Minimum shelf life from the date of manufacture - in a dry, frost-free place and in the unopened original container, approx.	36 months	36 months	36 months

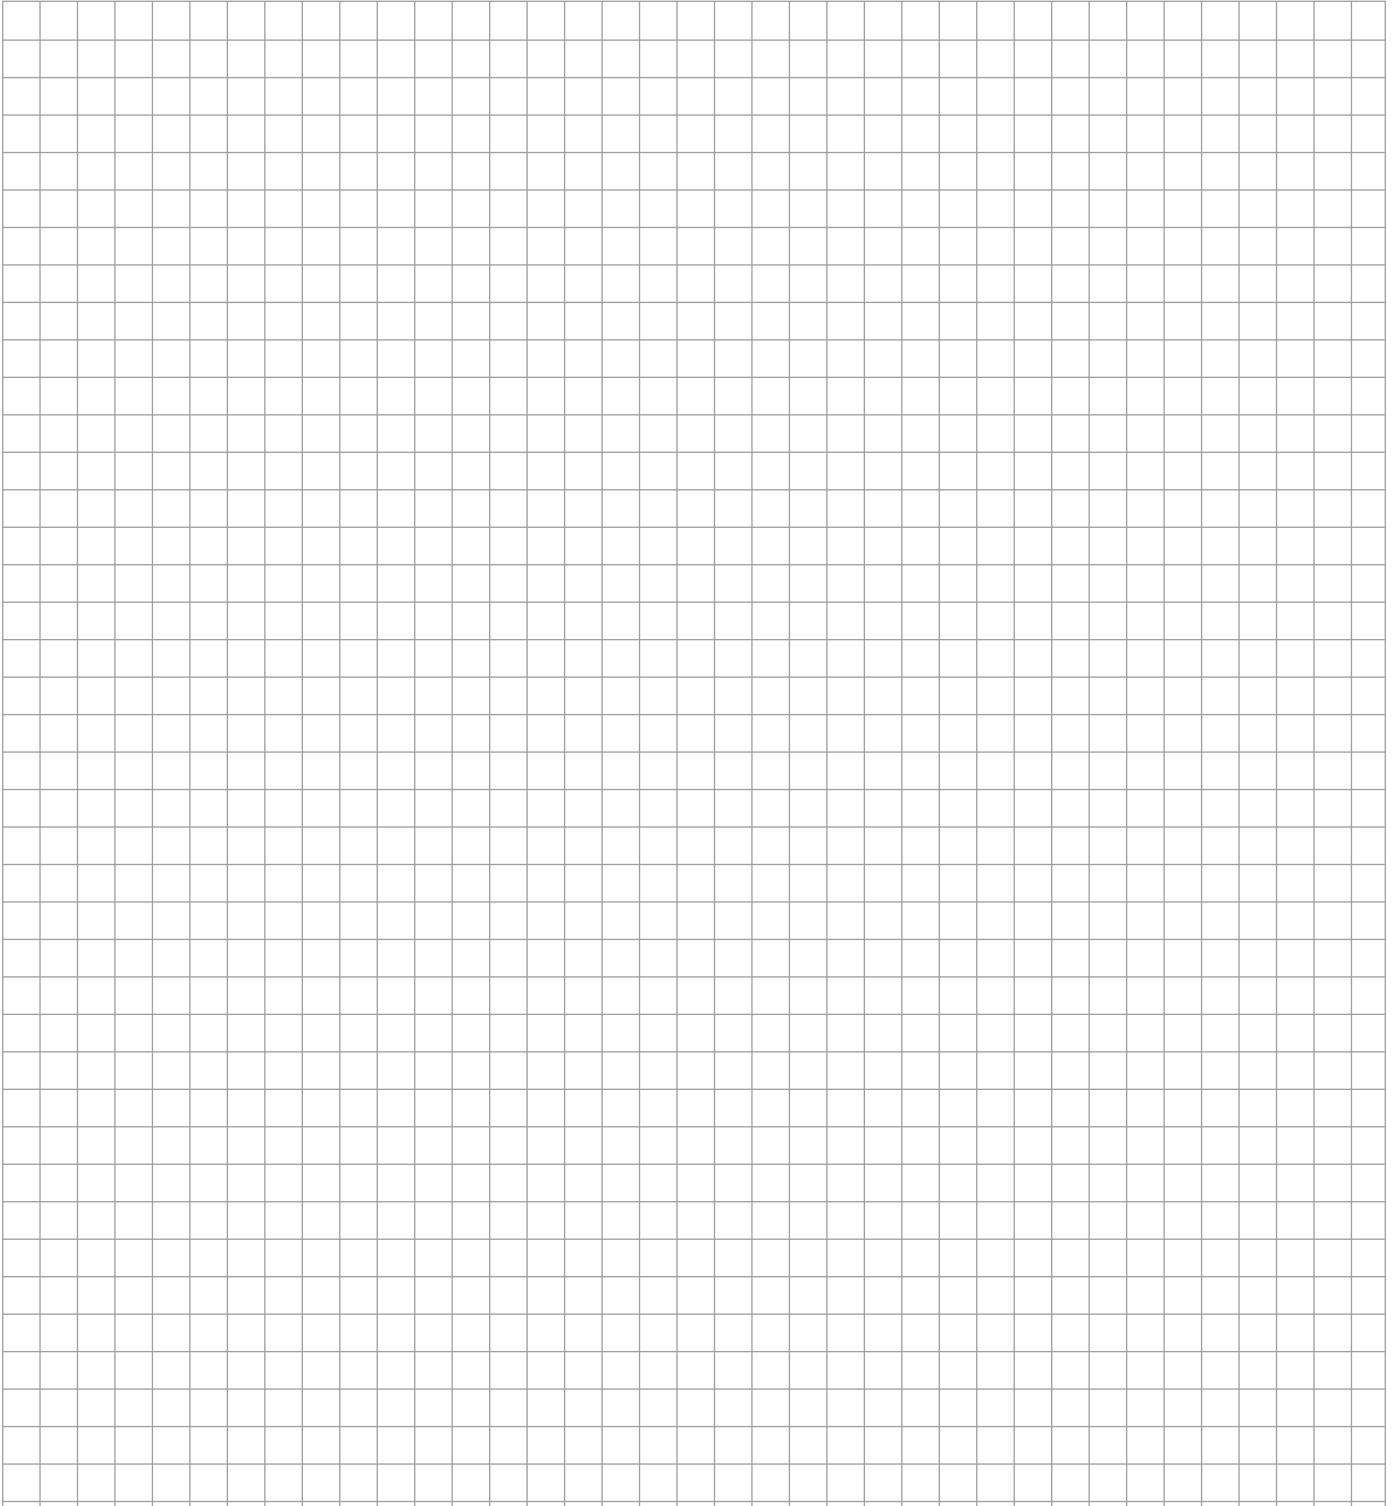



## MICROLUBE GL 261, GL 262

Special lubricating greases for boundary friction conditions and tribo-corrosion

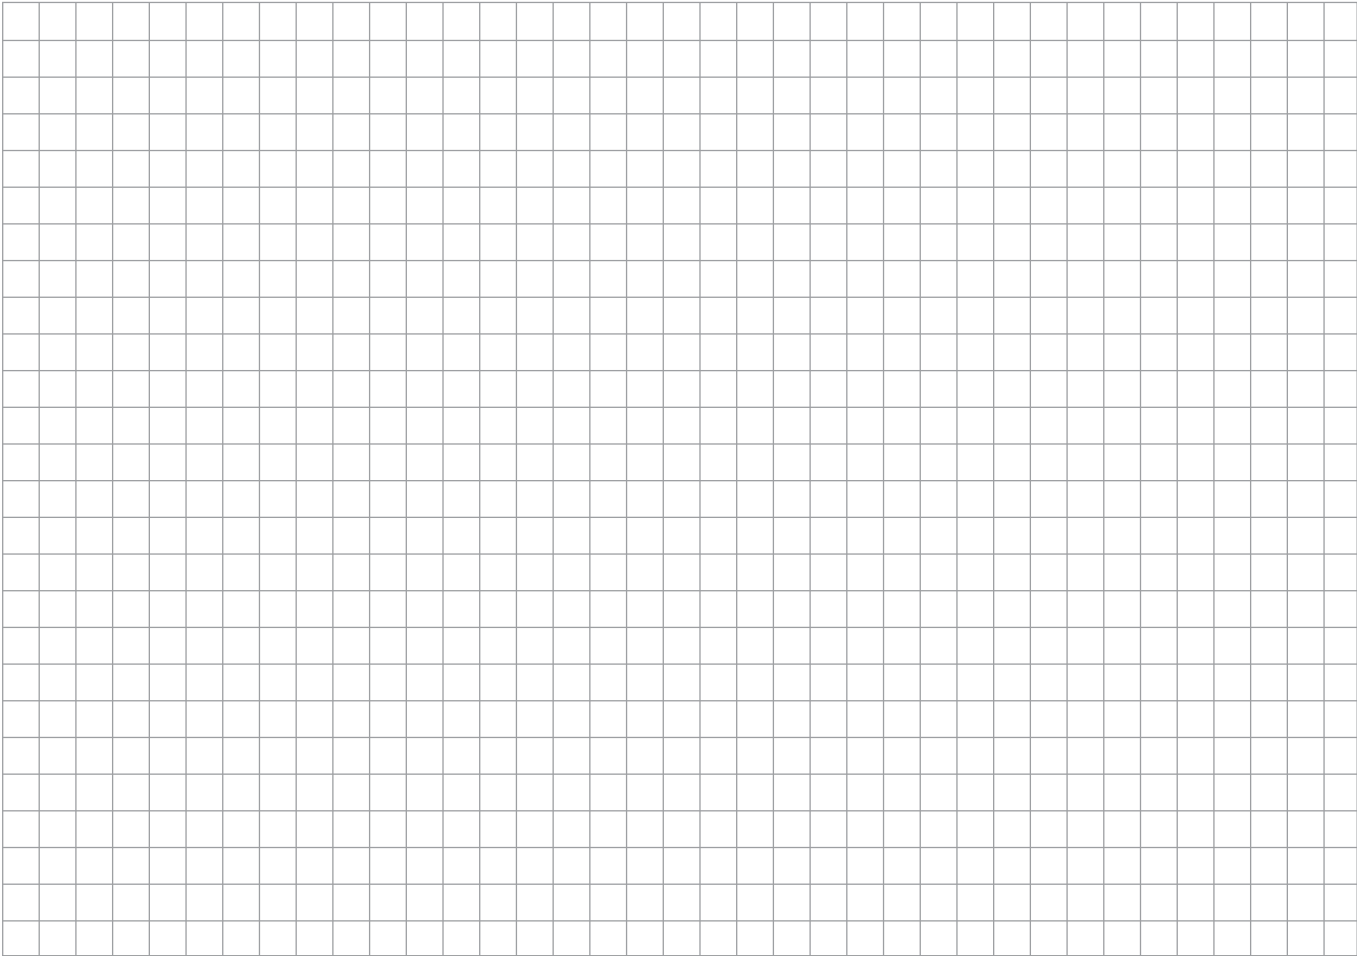

---

### **Klüber Lubrication – your global specialist**

Innovative tribological solutions are our passion. Through personal contact and consultation, we help our customers to be successful worldwide, in all industries and markets. With our ambitious technical concepts and experienced, competent staff we have been fulfilling increasingly demanding requirements by manufacturing efficient high-performance lubricants for more than 80 years.

**Klüber Lubrication München SE & Co. KG /  
Geisenhausenerstraße 7 / 81379 München / Germany /  
phone +49 89 7876-0 / fax +49 89 7876-333.**

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.

Publisher and Copyright: Klüber Lubrication München SE & Co. KG. Reprints, total or in part, are permitted only prior consultation with Klüber Lubrication München SE & Co. KG and if source is indicated and voucher copy is forwarded.



a company of the Freudenberg Group